


ASEC-PROBO: external release device with string

Installation:

1. position bracket A as shown in the picture and mount it onto the towing slide with the supplied self-tapping screw



2. insert the spring into bracket A predisposed drill, then fix the spring to the towing slide the self-tapping screw. Pay attention that the spring's eye is tighten by the screw in a way that the screw itself does not move.

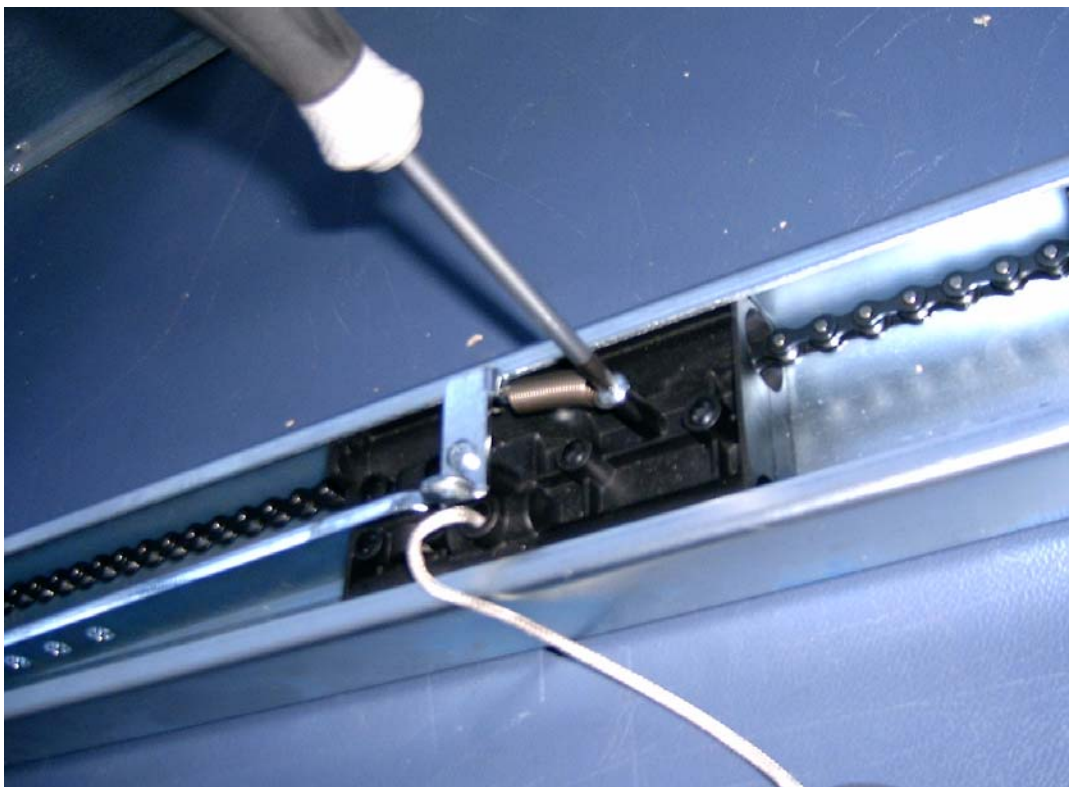

3. using the M4x8 trilobate screw (metric self tapping screw) create the screw thread on bracket A as shown in the picture and then screw in the screw lightly inserting the washer.



4. Keep the release string well tensed and force it to follow the indicated route



5. Tighten the screw so that the string is tightly fixed to bracket A



6. Insert the steel wire into the drill of bracket A and into the drill predisposed in the towing slide; then insert the string's sheath



7. Fix the string to the door and adjust the tension with the stretcher



ATTENTION: after installing the described release device, the release manoeuvre must always be carried out with the door handle and not by pulling the string that comes out of the towing slide.

